

BatteryShip.com

170-0737 Palm IIIc Series Battery Installation Instructions

PLEASE NOTE: Patience and care, along with moderate technical and hand tool ability, are required for the successful replacement of a Palm battery. **Excessive force may result in damage to your PDA.** The instructions below come with no warranty or guarantee. By utilizing these instructions, you agree to hold Batteryship.com blameless and unaccountable for any and all damages, problems, or personal injuries that may or may not arise by your use of these instructions. Replacing your Palm battery may void any warranty you have on your Palm. **Please read all instructions and back up your data BEFORE replacing the battery.**

Included Phillips Screwdriver



Included Plastic Flathead Screwdriver




Step 1.



Remove the four screws on the back of the PDA using the included Phillips screwdriver, as shown. Set the screws aside for reassembly.

Step 2.

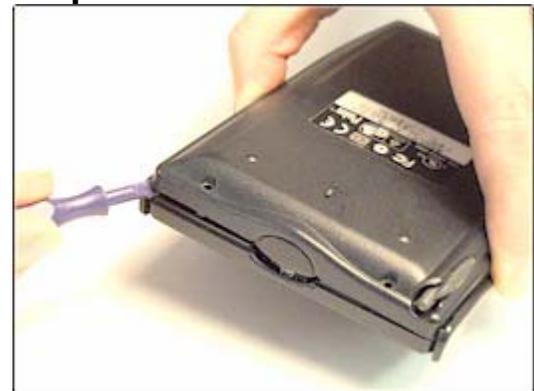


Once the screws have been removed, GENTLY pry open the Palm case (starting at either top corner, as shown) using the included plastic screwdriver. Pry all around the device until the back cover comes open completely.

Step 3.



Remove your old battery from its seat, using the enclosed plastic flathead screwdriver to assist (as shown) if necessary. **Leave the connector plugged in for this step.** The battery may be glued in, so pry under it GENTLY until it comes loose. Take care not to break the old battery while removing it.


Step 4.

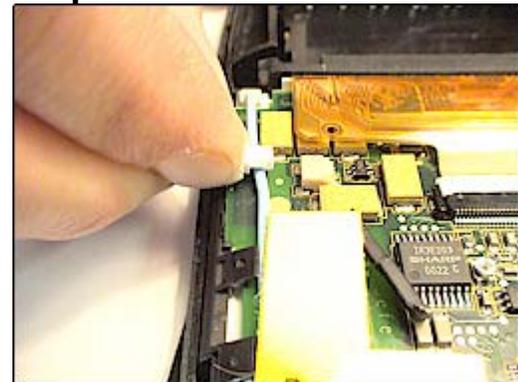

Disconnect the old battery at the connector by CAREFULLY pulling outward on the connector with your thumb and forefinger or tweezers. Be very sure that you are pulling outward on only the part of the connector that comes out, as shown, NOT on the whole connector.

(Steps 5 & 6 continued on back)

Step 5.

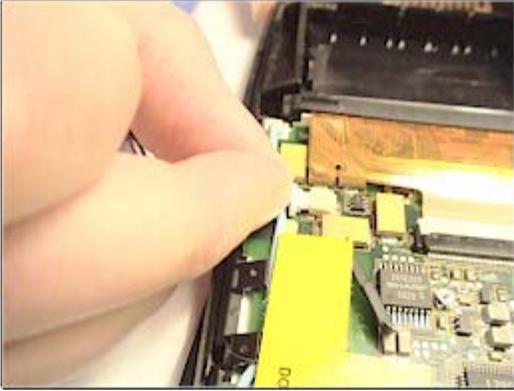

Making sure that your battery is facing the right direction (connector towards the socket), connect the new battery by pressing the connector at the end of the ribbon cable into the socket as shown. Note the location of the prongs in the socket of the Palm and the location of the plugs for the prongs on the battery connector, and connect them accordingly. Do not press too hard or try to force the pieces together. They will fit easily when correctly aligned. Place the new battery in its seat.

Step 6.



Making sure that all parts are in place, including the top piece (as shown), press the back cover of the Palm on over the new battery and screw the four screws back in. **FULLY CHARGE** your new battery before use. (Allow at least three hours. For quality control, we pre-charge many of our batteries, so yours may require less time.)

PLEASE NOTE: Our tools fit the majority of Palms, but some devices may have different screws installed for various reasons. If our tools do not fit your device, you may have the appropriate tool in a tool kit you already own. You can also check your local hardware or electronics store if you do not have the right tool at home.